



MTS-44




D [mm]
80 - 108



d [mm]
16; 17; SW14



C [daN]
250



T [°C]
0° - 100°



EP 2




Envase [pzs.]

50

MTS-44			
Tipo	Di ±0.1	Da ±0.2	carga máxima C [daN]
MTS-80x2,0.44	76,5	79,5	250
MTS-80x3,0.44	74,5	79,5	250
MTS-89x3,0.44	83,5	88,5	250
MTS-89x3,25.44	83,0	88,5	250
MTS-108x3,25.44	102,0	107,5	250

Otras medidas a consultar!

- Cazoleta: Acero cincado
- Casquillo reductor: Plástico
- Cojinete 6204

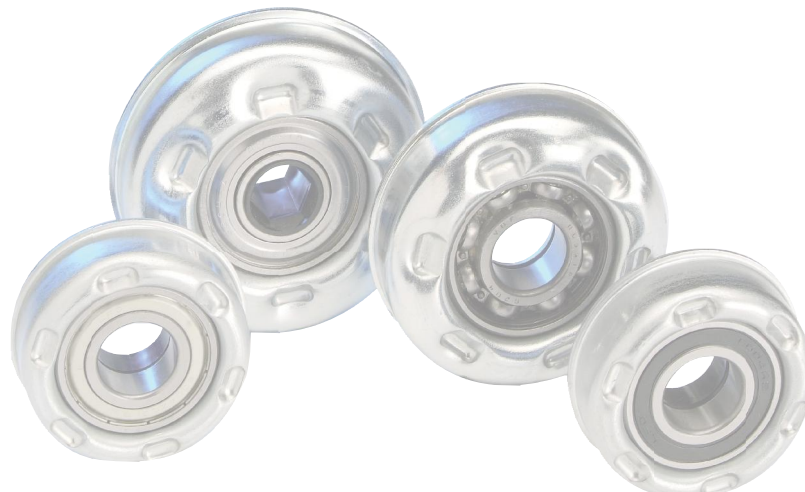

MTS